

Senoil plug valve is designed to be compatible with FMC ULT plug valve based on technology imported from FMC.

To ensure the quality, our plug valve body are forged by the high quality alloy steel. All processes including forging, machine, and heat treatment are strictly controlled and full traceable in according with API 6A, API 16C and Q1, as well as NACE-MR-01-75 (sour gas service), full packages of MTR can be sent with consignment upon client's request.



Plug valve is available in sizes ranging from 1" to 3" and can handle up to 15,000 psi for either standard service or sour gas service.

Besides ULT type, we also can supply SPM EXL type, and Halliburton type plug valve.

Plug Valve

Recommended Service

- High Pressure well service flowline
- Fracturing flowline
- well testing flowline
- Cementing and circulating flowline

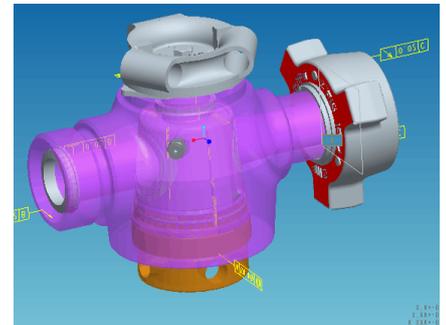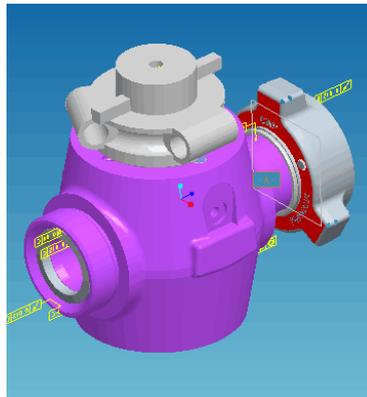

Features

- Forged body by alloy steel
- Low torque operation
- Flanged connection is available
- Fast, simple field repair

SENOIL

Available

- Colding work pressure: 2000psi to 15000psi
- Nominal bore size: 1", 1.5", 2", 3"
- End connection: thread, weco wing union, flange
- Sour Gas service is available

Specification

Description	Weco Connection	Service	Cold W.P (psi)	1"	1 x2"	2"	3"
Plug Valve	Fig 1002	Standard	10,000	Y	Y	Y	Y
		H ₂ S	7,500	Y	Y	Y	Y
	Fig 1502	Standard	15,000	Y	Y	Y	Y
		H ₂ S	10,000				
	Fig 2202	Standard	20,000	/	/	/	Y
			15,000				



For more information, please contact our sales (contact@shsenoil.com)